

KAC Security Device Range

Call Points and Switches

> Product Overview

- Extensive range of devices specifically for door security and evacuation
- Includes indoor and outdoor call points, keyswitches & pushbuttons
- Wide range of configurations and security specific function markings
- Available in green as standard



> Call Points

Range of indoor conventional call points with glass or resettable elements

- MCP3 - Normally open & normally closed contact. Single pole changeover achieved with two terminal blocks
- MCP4 - Double pole changeover contacts

Range of outdoor conventional call points with IP67 rating

- WCP3 - Normally open & normally closed contact. Single pole changeover achieved with two terminal blocks
- WCP4 - Double pole changeover set of contacts

Ancillary Devices

Choice of switching devices for indoor control solutions.

- Keyswitch Model (9100) - two and three position key options, key trapped or removable in each position
- Rockerswitch Model (9200) - two and three positions, momentary or latched mechanisms. Also a 240V mains rated indicator version available
- Pushbutton Model - miniature (9300) and shrouded (9400) versions. Momentary action or latching

> Applications




Product Availability subject to Order Volume

> MCP



Environmental Specification:
 Humidity: 93± 3% non condensing
 Operating Temperature: -10°C to +55°C
 Storage Temperature: -10°C to +55°C
 Ingress Protection (IP) Rating: IP24D
 For RoHS, WEEE & REACH please visit www.kac.co.uk

Mechanical Specification:
 Material: PC/ABS
 Weight: 130g Flush and 180g Surface

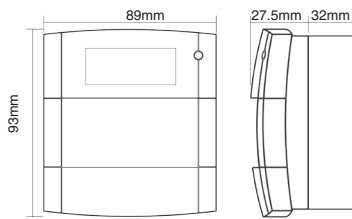

For further information see datasheets:
 MCP3 MCP4


More colours available for Fire or other applications:
 red, white, blue, yellow, orange

> WCP



Environmental Specification:
 Humidity: 93± 3% non condensing
 Operating Temperature: -25°C to +70°C
 Storage Temperature: -25°C to +70°C
 Ingress Protection (IP) Rating: IP67
 For RoHS, WEEE & REACH please visit www.kac.co.uk

Mechanical Specification:
 Material: PC/ABS
 Weight: 350g

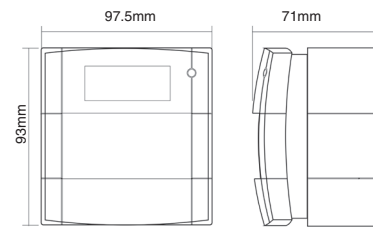

For further information see datasheets:
 WCP3 WCP4

More colours available for Fire or other applications:
 red, white, blue, yellow, orange

> Ancillary Devices

Environmental Specification:
 Humidity: 0-95% non-condensing
 Operating Temperature: between -20/25°C to +55/70°C*
 Storage Temperature: between -20/25°C to +55/70°C*
 Ingress Protection (IP) Rating: IP24D
 For RoHS, WEEE & REACH please visit www.kac.co.uk

Mechanical Specification:
 Material: ABS
 Weight: 120g Flush & 180g Surface (approx)

*For further information see datasheets:
 Keyswitch Model 9100
 Miniature & Shrouded Pushbutton models 9300 & 9400
 Rockerswitch Model 9200

Other colours available:
 red, white, blue, yellow, orange

Rockerswitch Model 9200



Pushbutton models



Keyswitch Model 9100



> KAC Alarm Company Ltd
 KAC House, Thornhill Road,
 North Moons Moat, Redditch,
 B98 9ND, United Kingdom
 Tel: +44 (0) 1527 406655
 Fax: +44 (0) 1527 406677
 e-mail: marketing@kac.co.uk

